


BLUE series

Line interactive UPS

1200 / 2200


450 / 650 / 850



KEY FEATURES

- Entry-level backup solution with excellent performance
- Build-in voltage regulator for reliable power quality
- DC cold start function
- Auto restart while AC recovery
- Front panel USB interface for easy installation(650/850)
- Easy-to-understand graphic LCD display
- AC Overloading protection
- Surge protection for phone / modem line
- CE compliant

TYPICAL APPLICATION

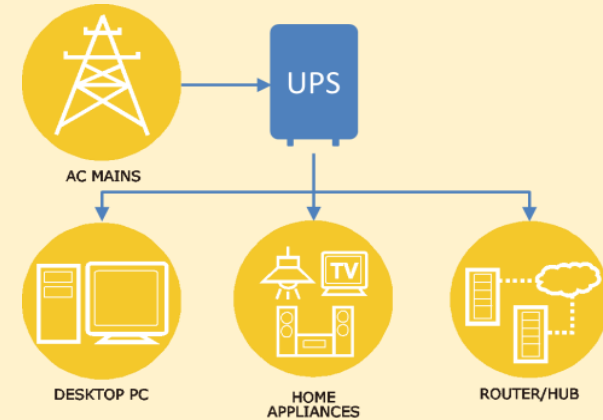

MODEL		AURORA VISTA 650		AURORA VISTA 850		AURORA VISTA 1200		AURORA VISTA 2200	
CAPACITY		650VA/360W		850VA/480W		1200VA/600W		2200VA/1200W	
INPUT	Input Voltage Range	162~290V _{AC}							
	Frequency Range	45~55/55~65 Hz							
	Input Wiring	Single phase with ground							
OUTPUT	Output Power Factor	0.55	0.56		0.5		0.55		
	Nominal Output Voltage	220/230/240 V _{AC}							
	Voltage Regulation (Line Mode)	±15%							
	Voltage Regulation (Battery Mode)	±10%							
	Frequency Range (Battery Mode)	50/60Hz ± 1 Hz							
	Output Waveform	Modified sine wave							
	Parallel Operation	N/A							
EFFICIENCY	Line Mode	95%							
	AVR Mode	88%							
	Battery Mode	60%							
BATTERY	Battery Type	12V/7Ah	12V/9Ah		12V/ 7Ah		12V/9Ah		
	Number of Internal Battery	1	1		2		2		
	Rated Battery Voltage	12V _{DC}	12V _{DC}		24V _{DC}		24V _{DC}		
	Backup Time (@ Typical PC load)	16 min	20 min		30 min		50 min		
	Recharge Time (to 90%)	6 hours							
	Charging Current	1A							
TRANSFER TIME	Battery Mode ↔ Line Mode	2-6 ms				4-8 ms			
DISPLAY		LCD							
AUDIBLE ALARM		Yes							
DIMENSION	WxHxD	100 x 143x 290 mm				139 x 195 x 364 mm			
NET WEIGHT		2.36 kg	2.7 kg		5.3 kg		5.93 kg		
ENVIRONMENT	Operating Temperature	0~40℃							
	Noise Level	<40dB						<45dB	
INTERFACE	USB	Yes							
	External Slot	No							
	TVSS protection	RJ11 Jack				RJ45 Jack			